

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LUXULA

**Supplier's address:** ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

**Model identifier:** LX-SL-100-5000

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	100	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	11 700 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	5 000
On-mode power ( $P_{on}$ ), expressed in W	100,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	88	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	215	
	Depth	562	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,345 0,355
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	80	Survival factor	-
the lumen maintenance factor	-		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a)-: not applicable;

(b)-: not applicable;

## Spectrum Test Report

### Product Information

Product Type: G017EI-100W  
Product Number: 1


Product Spec: 5000K

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3423$   $y=0.3582$   $u(u')=0.2070$   $v=0.3250$   $v'=0.4875$   
 CCT:  $T_c=5126K$  ( $duv=0.00441$ ) Color Ratio:  $R=0.150$   $G=0.808$   $B=0.042$   
 Peak Wavelength: 0nm Half Bandwidth: 19.8nm  
 Dominant Wavelength: 567.8nm Color Purity: 0.102

CRI:  $R_i: R_a=81.8$

R1 =81 R2 =82 R3 =82 R4 =88 R5 =81 R6 =75 R7 =90 R8 =75  
 R9 =13 R10=56 R11=87 R12=49 R13=80 R14=90 R15=78

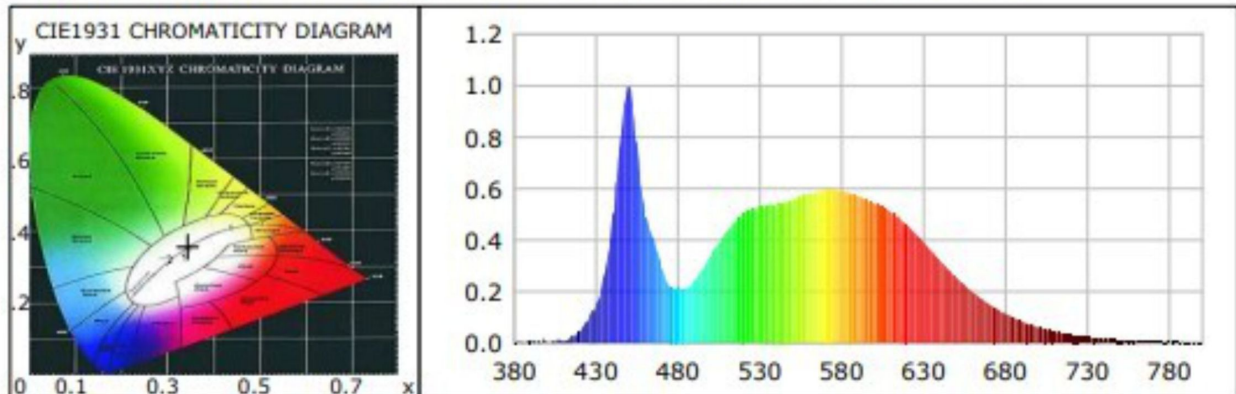

### Photometric Parameters

Luminous Flux: 11922.5 lm

Efficiency: 119.11 lm/W

Radiant Power: 36.423 W

### Electric Parameters

Voltage: 230.70V

Current: 0.4365A

Power: 100.100W

Power Factor: 0.994

Frequency: 50.00Hz

### Test Information


Scan Range: 380nm~800nm:1nm  
 Stabilization Time: 0 Min  
 Max of Signal: 12566 (37476)

Photometric Method:  
 Photometric Condition: Sphere diameter: 1.00m, 4IT  
 CCD Integration Time: 69.88 ms

Condition:  
 Test Lab:  
 Operator:

Test Device: Inventfine CMS-2S  
 Test Time:  
 Inspector:

Model placed on the Union market from 09/12/2022



**EPREL registration number:** 1425869

<https://eprel.ec.europa.eu/qr/1425869>

**Supplier:** ENOVATEK GmbH (Importer)

**Website:** [www.enovatek.de](http://www.enovatek.de)

**Customer care service:**

**Name:** ENOVATEK GmbH

**Website:** [www.enovatek.de](http://www.enovatek.de)

**Email:** [info@enovatek.de](mailto:info@enovatek.de)

**Phone:** +49 4461 / 7464233

**Address:**

Sillensteder Straße 213

26441 Jever

Germany