

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ENOVALITE

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: ELED600200

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	36	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 600 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	36,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,379 0,383	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 136	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	80	Survival factor	-	
the lumen maintenance factor	-			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;

LED Test Report

Product Mark

Product Type :812317

Temperature :65°C


Operator :admin

Remark:

Manufacturer :

Humidity :65%

Test Date :2021-05-27 15:07:06

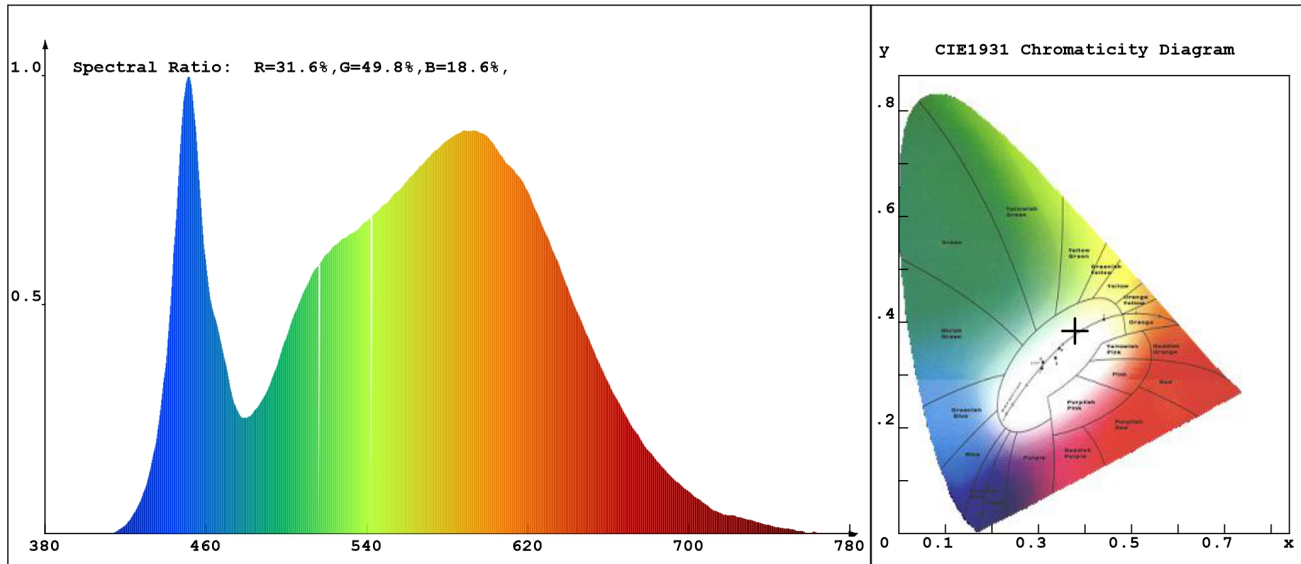

Chroma Parameters

Chro.Coord.:x=0.3790 y=0.3836 u=0.2215 v=0.3363 duv=0.0036

CCT: 4088K Dominant Wave.:576.9nm Purity:28.9%

Flux RGB Ratio:R=17.6%,G=80.1%,B=2.3% Peak Wave:451.6nm Half Width:20.1nm

Rendering Index:Ra= 81.7

R1 =79 R2 =88 R3 =95 R4 =81 R5 =80 R6 =84 R7 =86 R8 =62

R9 =1 R10=71 R11=79 R12=58 R13=81 R14=97 R15=72

Photo Parameters

Flux:3377.53lm

Eff.:96.1lm/W

Radiant:9030.2mW

Iv:0.0mcd

Efficiency:0.142

Eff Level:A+ (EU 874-2012)

Ele. Parameters

Voltage:U=232.100V

Current:I=0.1580A

Power:P=35.15W

Power Factor:PF=0.958

Instrument state

Instrument:Hopoo HP8000

Integral Time: 61.074ms


VPeak: 13290

VDark: 1229

Scan Range: 380-780nm

Product ID: 201306373

Model placed on the Union market from 16/03/2023



EPREL registration number: 1526925

<https://eprel.ec.europa.eu/qr/1526925>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213
26441 Jever
Germany