

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LUXULA

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: LX400223

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD 2835		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	50,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	187	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	210	
	Depth	45	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,403
Parameters for LED and OLED light sources:			
R9 colour rendering index value	80	Survival factor	-
the lumen maintenance factor	-		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a)-: not applicable;

(b)-: not applicable;

Lightsource Test Report


Product Information

Product Category: LED FLOOD LIGHT
Product Spec: 3000K

Product Type: LX400223
Product Number: 4

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4408$ $y=0.4024$ $u(u')=0.2538$ $v=0.3475$ $v'=0.5213$
CCT: $T_c=2923K$ ($duv=-0.00116$) Color Ratio: $R=0.219$ $G=0.765$ $B=0.016$
Peak Wavelength: 595.2nm Half Bandwidth: 112.1nm
Dominant Wavelength: 583.6nm Color Purity: 0.531
CRI: $R_a=71.9$ TM30: $R_f=70$, $R_g=95$
 $R1=69$ $R2=82$ $R3=93$ $R4=68$ $R5=68$ $R6=76$ $R7=76$ $R8=43$
 $R9=-32$ $R10=59$ $R11=63$ $R12=49$ $R13=71$ $R14=96$ $R15=61$
Color Quality Scale: $Q_a=71.7$, $Q_f=72.4$, $Q_p=75.1$, $Q_g=89.8$
 $Q1=68$ $Q2=96$ $Q3=70$ $Q4=66$ $Q5=71$ $Q6=70$ $Q7=70$ $Q8=77$
 $Q9=95$ $Q10=80$ $Q11=75$ $Q12=73$ $Q13=73$ $Q14=60$ $Q15=62$

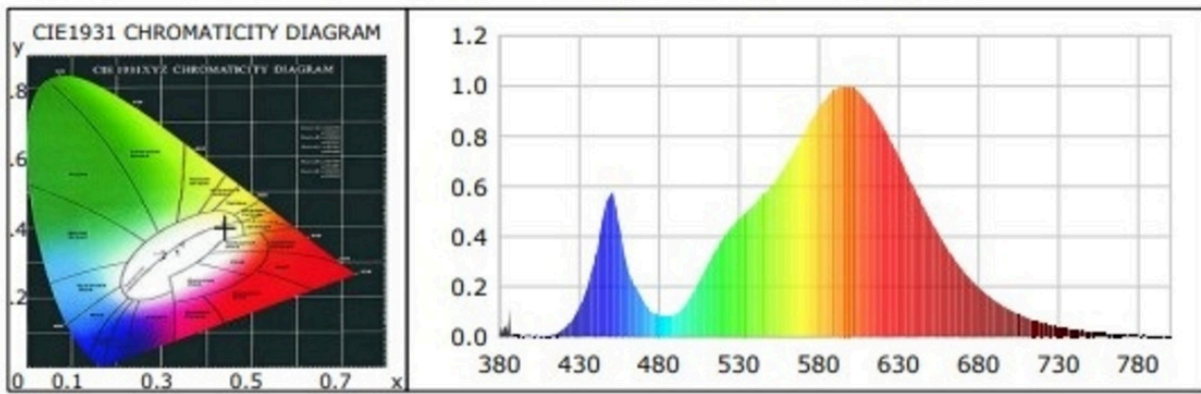

Photometric Parameters

Luminous Flux: 4403.87 lm
EEI: 0.16

Efficiency: 85.85 lm/W

Radiant Power: 12.555 W

Energy Efficiency Class: A+ (EU 874-2012)

Electric Parameters

Voltage: 231.70V
Power Factor: 0.9950

Current: 0.2220A
Frequency: 50.00Hz

Power: 51.30W

Test Information


Scan Range: 380~800:1nm
Stabilization Time: 0 ms
Max of Signal: 18932 (37019)

Photometric Method: sphere-spectroradiometer
Photometric Condition: Sphere diameter: 1.00m, 4T
CCD Integration Time: 75.93 ms

Condition: $T_x:0.0^{\circ}C$, $T_i:0.0^{\circ}C$, R.H.:60%
Test Lab:
Operator:

Test Device: Inventive CMS-2S (Plus)
Test Time:
Inspector:

Model placed on the Union market from 01/03/2024



EPREL registration number: 1855295

<https://eprel.ec.europa.eu/qr/1855295>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213

26441 Jever

Germany