

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ENOVALITE

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: ELED800121

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	80	Energy efficiency class	D
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	12 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	5 000
On-mode power (P_{on}), expressed in W	80,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,345 0,355	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	80	Survival factor	-	
the lumen maintenance factor	-			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

Product Information

Product Type: ELED800121

Product Spec: 5000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3514$ $y=0.3669$ $u(u')=0.2098$ $v=0.3286$ $v'=0.4929$

CCT: $T_c=4830K$ ($duv=0.00506$)

Color Ratio: $R=0.156$ $G=0.801$ $B=0.042$

Peak Wavelength: 1610612736nm

Half Bandwidth: 22.5nm


Dominant Wavelength: 570.8nm

Color Purity: 0.156

CRI: R_i : $R_a=81.1$

$R_1=79$ $R_2=87$ $R_3=93$ $R_4=79$ $R_5=78$ $R_6=82$ $R_7=87$ $R_8=64$

$R_9=0$ $R_{10}=69$ $R_{11}=77$ $R_{12}=51$ $R_{13}=81$ $R_{14}=96$ $R_{15}=73$

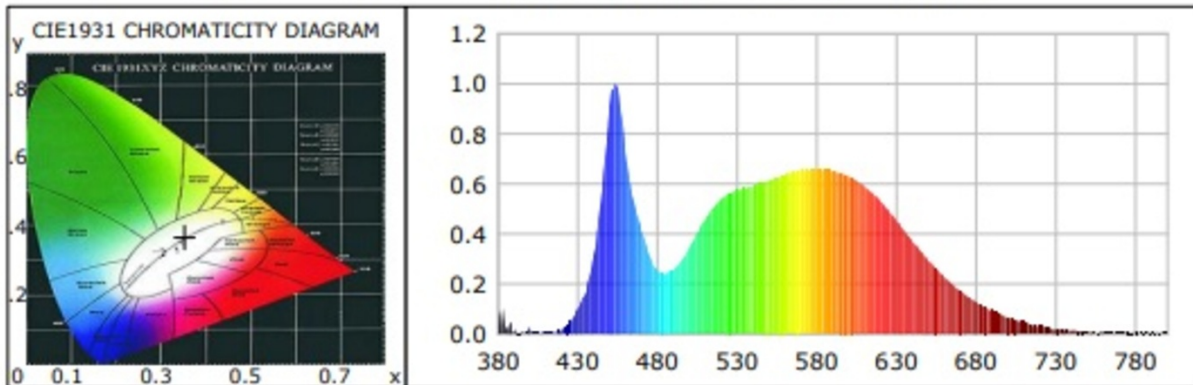

Photometric Parameters

Luminous Flux: 12097.3 lm

Efficiency: 150.65 lm/W

Radiant Power: 36.416 W

Electric Parameters

Voltage: 231.10V

Current: 0.3650A

Power: 80.300W

Power Factor: 0.952

Frequency: 50.00Hz

Test Information

Scan Range: 380nm~800nm:1nm

Stabilization Time: 0 Sec

Max of Signal: 9277 (38559)

Photometric Method: sphere-spectroradiometer

Photometric Condition: Sphere diameter: 1.00m, 4[1]

CCD Integration Time: 113.91 ms

Condition: $T_x:0.0^{\circ}C$, $T_i:0.0^{\circ}C$

Test Lab:


Operator:

Test Device: Inventfine CMS-2S (Plus)

Test Time: 2021-08-24 10:28:08

Inspector:

Model placed on the Union market from 01/03/2024



EPREL registration number: 1864257

<https://eprel.ec.europa.eu/qr/1864257>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213
26441 Jever
Germany