

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LUXULA

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: LX800123

Type of light source:

| | | | |
|---|-----|---------------------------------|------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | SMD | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters

| Parameter | Value | Parameter | Value |
|--|----------------------------|--|---|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 150 | Energy efficiency class | E |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 18 000 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 5 000 |
| On-mode power (P_{on}), expressed in W | 150,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,50 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 80 |
| Outer dimensions without separate control gear, lighting control | Height | 760 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 110 | |
| | Depth | 87 | |
| | | | See image in last page |

| | | | |
|---|------|---------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,345 0,355 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 80 | Survival factor | - |
| the lumen maintenance factor | 0,70 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,90 | Colour consistency in McAdam ellipses | 6 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 1,0 | Stroboscopic effect metric (SVM) | 0,9 |

(a)-: not applicable;

(b)-: not applicable;

Spectrum Test Report


Product Information

Product Type: LX800123
Product Number: 1

Product Spec: 5000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3423$ $y=0.3583$ $u(u')=0.2070$ $v=0.3250$ $v'=0.4875$
 CCT: $T_c=5128K$ ($duv=0.00448$) Color Ratio: R=0.150 G=0.808 B=0.042
 Peak Wavelength: 0nm Half Bandwidth: 19.9nm
 Dominant Wavelength: 567.7nm Color Purity: 0.102
 CRI: Ri: Ra= 81.8
 R1 =81 R2 =82 R3 =82 R4 =88 R5 =81 R6 =75 R7 =90 R8 =75
 R9 =12 R10=56 R11=87 R12=49 R13=80 R14=90 R15=78

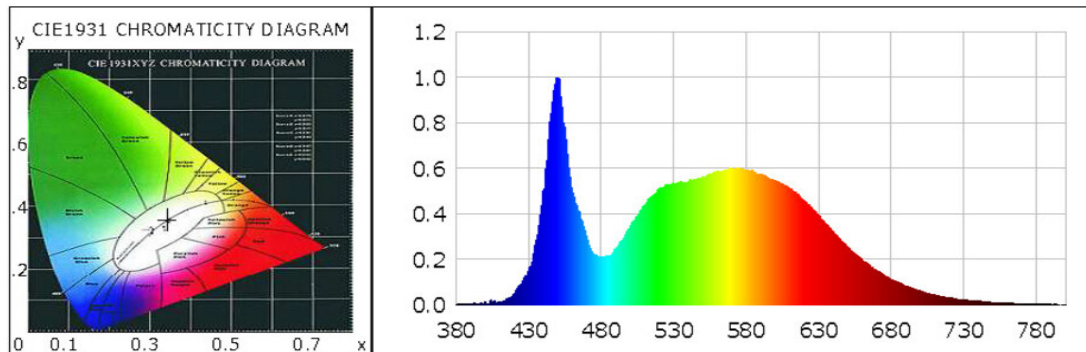

Photometric Parameters

Luminous Flux: 18101.6 lm Efficiency: 120.84 lm/W Radiant Power: 54.989 W

Electric Parameters

Voltage: 230.30V Current: 0.6610A Power: 149.792W
 Power Factor: 0.984 Frequency: 50.00Hz

Test Information


Scan Range: 380nm~800nm:1nm
 Stabilization Time: 0 Min
 Max of Signal: 12561 (37479)

Photometric Method:
 Photometric Condition: Sphere diameter: 1.00m, 4π
 CCD Integration Time: 69.88 ms

Condition:
 Test Lab:
 Operator:

Test Device: Inventfine CMS-2S
 Test Time:
 Inspector:

Model placed on the Union market from 30/06/2024



EPREL registration number: 2014289

<https://eprel.ec.europa.eu/qr/2014289>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213

26441 Jever

Germany