

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ENOVALITE

Supplier's address: ENOVATEK GmbH, Sillensteder Straße 213, 26441 Jever, DE

Model identifier: ELED800102

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	150	Energy efficiency class	D
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	21 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	5 000
On-mode power (P_{on}), expressed in W	150,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	230	
	Depth	598	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,345 0,355
Parameters for LED and OLED light sources:			
R9 colour rendering index value	80	Survival factor	-
the lumen maintenance factor	-		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a)-: not applicable;

(b)-: not applicable;

Spectrum Test Report

Product Information

Product Type: G016EI-150W

Product Spec: 5000K

Product Number: 1

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3426$ $y=0.3587$ $u(u')=0.2070$ $v=0.3252$ $v'=0.4877$

CCT: $T_c=5118K$ ($duv=0.00456$)

Color Ratio: $R=0.150$ $G=0.809$ $B=0.042$

Peak Wavelength: 0nm

Half Bandwidth: 19.8nm

Dominant Wavelength: 567.9nm

Color Purity: 0.105

CRI: R_i : $R_a=81.8$

$R_1=81$

$R_2=82$

$R_3=82$

$R_4=88$

$R_5=81$

$R_6=75$

$R_7=90$

$R_8=75$

$R_9=12$

$R_{10}=56$


$R_{11}=87$

$R_{12}=49$

$R_{13}=80$

$R_{14}=90$

$R_{15}=77$

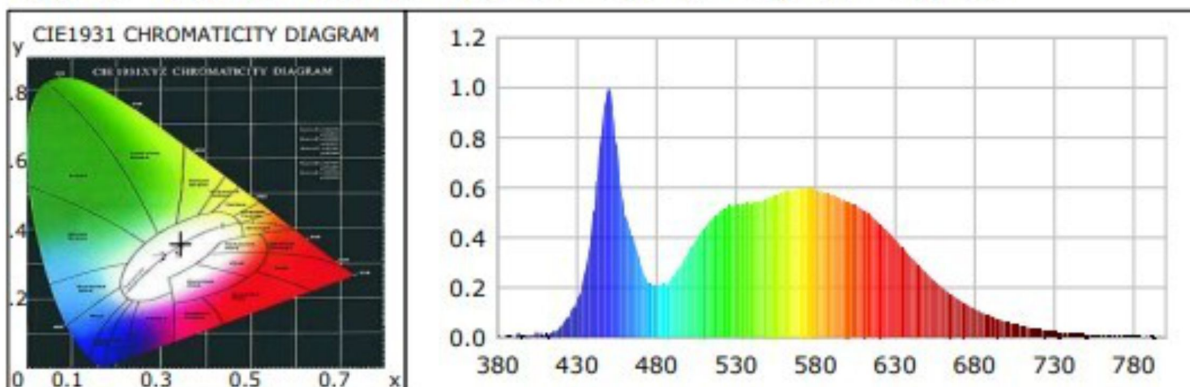

Photometric Parameters

Luminous Flux: 20783.0 lm

Efficiency: 137.87 lm/W

Radiant Power: 63.459 W

Electric Parameters

Voltage: 230.70V

Current: 0.6580A

Power: 150.740W

Power Factor: 0.993

Frequency: 50.00Hz

Test Information

Scan Range: 380nm~800nm:1nm

Stabilization Time: 0 Min

Max of Signal: 12604 (37474)

Photometric Method:

Photometric Condition: Sphere diameter: 1.00m, 4 π

CCD Integration Time: 69.88 ms


Condi
Test Lab
Operator:

Test Device: Inventfine CMS-2S

Test Time:

Inspector:

Model placed on the Union market from 09/12/2022



EPREL registration number: 1785371

<https://eprel.ec.europa.eu/qr/1785371>

Supplier: ENOVATEK GmbH (Importer)

Website: www.enovatek.de

Customer care service:

Name: ENOVATEK GmbH

Website: www.enovatek.de

Email: info@enovatek.de

Phone: +49 4461 / 7464233

Address:

Sillensteder Straße 213
26441 Jever
Germany