

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** OPTONICA

**Supplier's address:** Anatolii Lazarov, Mitr. Serafim Slivenski, Mladost 1 144, 1784 Sofia, BG

**Model identifier:** 2686

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	NO		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 010 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2548...2815
On-mode power ( $P_{on}$ ), expressed in W	24,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	170	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	170	
	Depth	27	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,465 0,411
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	443	Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	10	Survival factor	0,98
the lumen maintenance factor	0,92		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,70	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	0,2


(a) '-': not applicable;

(b) '-': not applicable;

**Spectral Distribution Curve**

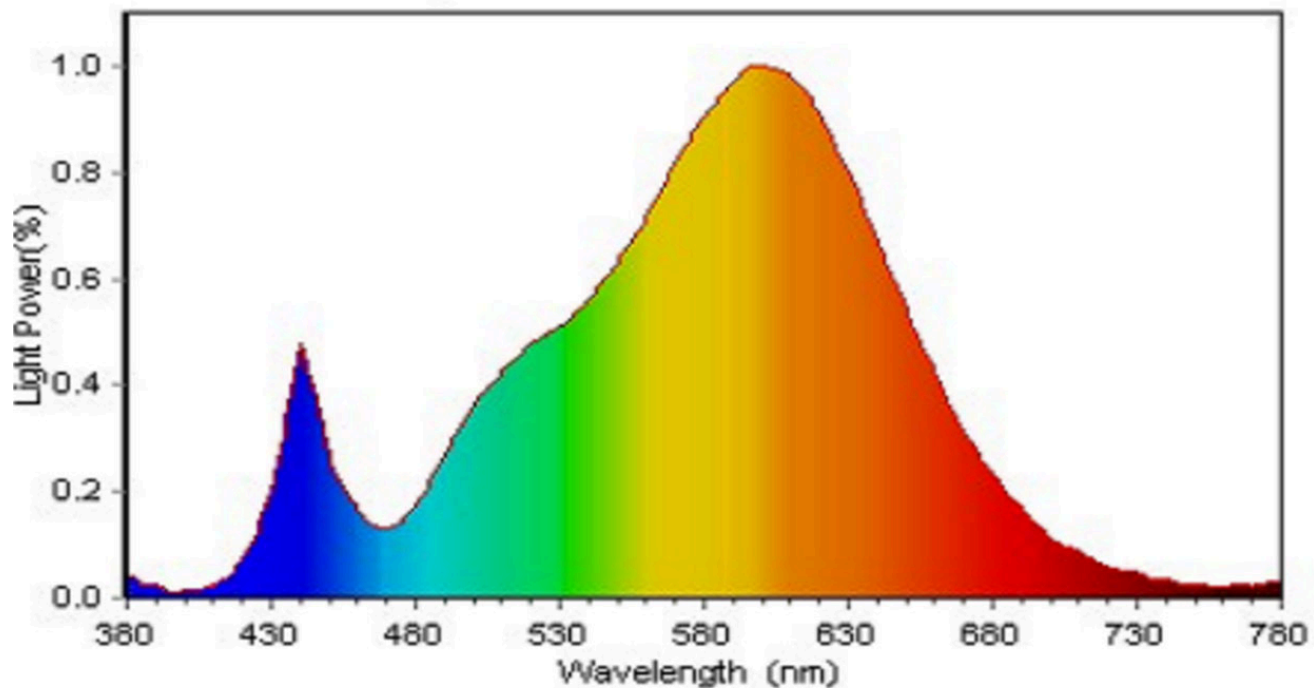

Model placed on the Union market from 21/01/2020



**EPREL registration number:** 754617

<https://eprel.ec.europa.eu/qr/754617>

**Supplier:** PRIMA GROUP 2004 (Importer)

**Website:** [www.optonicaled.com](http://www.optonicaled.com)

**Customer care service:**

**Name:** Anatolii Lazarov

**Website:** [www.optonicaled.com](http://www.optonicaled.com)

**Email:** [office@optonicaled.com](mailto:office@optonicaled.com)

**Phone:** +359 2 988 45 72

**Address:**

Mitr. Serafim Slivenski, Mladost 1 144

1784 Sofia

Bulgaria